


ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

REVISIONS			DOC. NO. SPC-F004 * Effective: 12/21/98 * DCP No: 680					
DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
948	A	RELEASED	HYD	6/20/00	JC	11/22/00	DJC	12/1/00

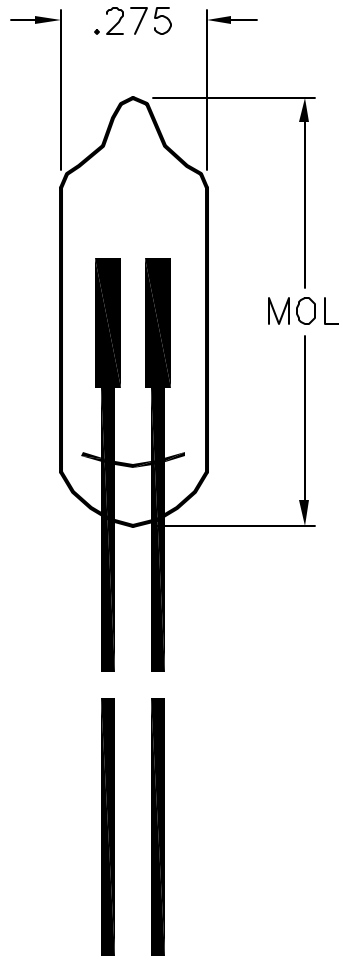

SPC TYPE NO.	CURRENT mA	MAX. BREAKDOWN		CIRCUIT VOLTS	SERIES RESISTOR	MOL	LIFE (HOURS)
		VOLTS/AC	VOLTS/DC				
A1A(NE-2)	0.6	65	90	100-125	100K	1	25000
A1B	0.3	65	90		220K	0.5	
A1C *	1.2	95	135		47K	0.5	
C2A *	1.9	95	135		30K	0.75	
A9A(NE-2E)	0.7	65	90		100K	0.75	

Notes:

1. Resistors are all external
2. * High brightness

SPC-F004.DWG

DISCLAIMER:
ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.



SPC TECHNOLOGY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.	DRAWN BY:	DATE:	DRAWING TITLE:			
	HISHAM ODISH	6/20/00	T-2 WIRE TERMINAL, NEON LAMP			
	CHECKED BY:	DATE:	SIZE	DWG. NO.	ELECTRONIC FILE	REV
	JOHN COLE	11/22/00	A	TA-264	TA-264.DWG	A
APPROVED BY:	DATE:	SCALE: NTS		U.O.M.: INCHES		SHEET: 1 OF 1
DANIEL CAREY	12/1/00					